

WHERE PRECISION MEETS PRODUCTIVITY



imagePROGRAF TX-3200 MFP Z36

Canon

LOFFLER

imagePROGRAF TX Series

EFFICIENCY

imagePROGRAF TX-3200

36" printer

Up to 199
D-size prints/hour**

Up to 2
rolls



imagePROGRAF TX-3200 MFP Z36

Scan up to 13 ips B/W
6 ips Color

Scan up to 1200 dpi

15.6" Controller



imagePROGRAF TX-4200

44" printer

Up to 3.3
D-size prints/min.*

Up to 2
rolls



imagePROGRAF TX-4200 MFP Z36

Scan up to 13 ips B/W
6 ips Color

Scan up to 1200 dpi

15.6" Controller



STREAMLINE AND OPTIMIZE WORKFLOWS

With the capability to print both monochrome line drawings and eye-catching full-color posters, the imagePROGRAF TX large-format printer series is designed with production and versatility in mind within the aqueous inkjet market.

Key Features:

- **LUCIA TD 5-Color Pigment Ink System**—the Magenta ink and improved line clarity help produce detailed lines and sharp text for CAD designs, signage, and more.
- **Intelligent Media Handling** offers automatic media feeding and media type/length/width detection for enhanced operation that is approximately 34 percent faster than previous generations.
- **Optional Multifunction Roll Unit** acts as a dual-roll unit or a take-up reel for continuous production printing.
- **Environmentally Conscious**—EPEAT® Gold and Energy Star® certified.



ARCHITECTURE



ENGINEERING



CONSTRUCTION



MANUFACTURING
DESIGN



DISTRIBUTION
SERVICES



TRANSPORTATION
SERVICES



GOVERNMENT
AGENCIES



CORPORATE
SPACES



PROFESSIONAL
PRINT SHOPS



HIGHER
EDUCATION/
UNIVERSITIES

Print with more confidence knowing Canon's patented technology and advanced security features are on the job.

LUCIA TD Magenta Pigment Ink

With updated magenta ink, the imagePROGRAF TX Series is designed to deliver outstanding red color reproduction suitable for a wide range of markets and applications when compared to previous models. The use of pigment ink for all colors helps to ensure prints are resistant to fading, making them ideal for poster output, but also provides water resistance for outdoor prints such as technical documents and line drawings.

Improved Line Clarity

Image processing improvements and LUCIA TD ink help to enhance CAD drawings, blueprints, AEC documentation, and poster reproductions with a large color gamut and improved text and line quality when compared to the previous TX Series. This makes output more crisp, defined, and clear.

Color Calibration

Now available in the imagePROGRAF TX Series, the ability to calibrate your printer helps ensure your output is color consistent over time and across multiple TX-3200/4200 devices.

Speed*

At up to 3.3 D-size prints per minute and with quicker media loading by approximately 34 percent, these TX printers are faster than the previous models.

Ease of Use

The imagePROGRAF TX Series has been built with production and efficiency in mind with a compact design, semi-translucent ink tank and media covers, an intuitive user interface screen, end-user installable printheads, maintenance cartridges, hot-swap ink tanks, and more! The user interface screen displays the ink and sub-ink tank levels, media indicator levels, and other setting prompts all on the home screen!

Intelligent Media Handling

Once the media is loaded into the imagePROGRAF TX Series, the printer will automatically find the leading edge and feed the media. From there, the imagePROGRAF TX Series will automatically determine the media type, length, and width, which will be shown on the display panel.

Z36 Scanner

Workflow is effortless and consistent with Canon's integration of the scanner with the imagePROGRAF TX Series. Similar to the previous model, the 36" lightweight Z36 scanner is positioned on top of the device, providing a compact, all-in-one solution for ease of use.

- Scan monochrome documents at up to 13" per second and color documents at up to 6" per second
- 15.6" Controller
- Scan up to 1200 dpi

Optional Multifunction Roll Unit

The optional Multifunction Roll System can be used in two different ways.


- Second media roll unit
- Take-up reel

Security Features**

The imagePROGRAF TX Series large format printers come equipped with security features designed to help protect confidential information. Features include PIN Printing, self-encrypting hard drive, capabilities to disable the USB port, ethernet port, USB direct thumb drive, and more to help ensure peace of mind for the privacy of your documentation.

Environmentally Conscious

Currently registered as EPEAT® Gold—a first in the imagePROGRAF TX Series—and as ENERGY STAR® certified, these large format printers are replacing EPS packaging materials with cardboard packaging and helping to reduce power consumption.

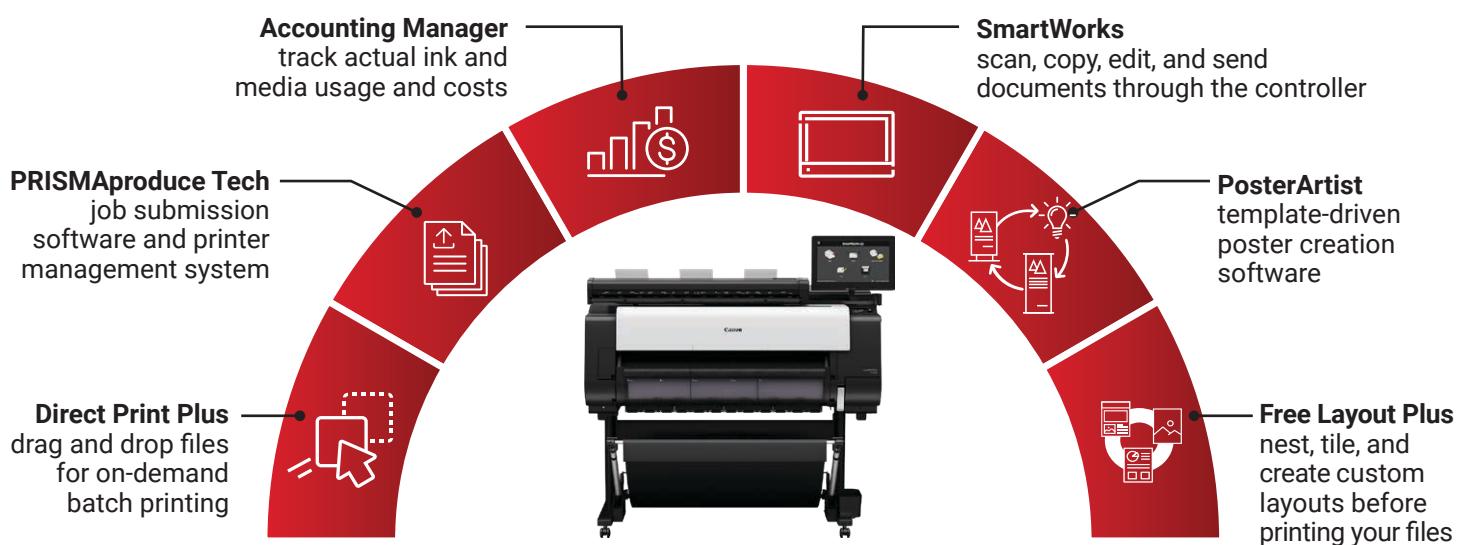

Printer Specifications

imagePROGRAF TX-3200/4200 | imagePROGRAF TX-3200/4200 MFP Z36

Printhead PF-06	Print Language SGRaster, HP-GL/2, HP RTL, PDF, JPEG, CALS G4	Maximum Media Thickness 0.003" - 0.04" (0.07 mm - 1.0 mm)
Technology FINE (Photolithography Inkjet Nozzle Engineering)	Interface USB B Port: Hi-Speed USB (12 Mbit/sec, 480 Mbit/sec) USB A Port: USB thumb drive Gigabit Ethernet: IEEE 802.3u/ab/x (100/1000Base-T, Full Duplex), SNMP, HTTP, TCP/IP (IPv4/IPv6), FTP Wi-Fi: IEEE 802.11n/g/b	Digital Imaging Technology Contact Image Sensor (CIS) Technology (SingleSensor Assembly) <ul style="list-style-type: none"> 24-bit RGB 16-bit grayscale image capture Panchromatic monochrome and black and white Bi-directional extra long-life LED light system for optimum object illumination and instant-on scanning capability
Print Resolution (Max.) 2400 x 1200 dpi	Acoustic Noise Operation Approx: 51 dB (A) Standby Approx: 35 dB (A) Acoustic Power: Approx 6.9Bel's	Included Software SmartWorks MFP Scan-to-Copy/File/Email with Real-time Image Viewer; supports TIFF, JPEG, and PDF
Line Accuracy¹ ±0.1% or Less	Power Supply AC 100 - 240 V (50 - 60 Hz)	Operating System Windows 11 Enterprise LTSC (x64)
Minimum Line Weight² 0.02 mm	Power Consumption Maximum: Approx. 86W TX-3200, 87W TX-4200 Standby: Approx. 2.0 W Power Off: Approx. 0.3 W	Scanner Interface Kit 3x USB 3.2 and 1x USB 2.0 rear and 1x USB 3.2 front, all type A
Number of Nozzles Matte Black: 5,120 Nozzles Other Colors: 2,560 Nozzles per Color	Certifications ENERGY STAR® certified, EPEAT Gold, TUV, CB	Operating Environments 10°C – 35°C, 10 - 90% RH, Non-condensing
Droplet Size 5 Picoliter	Operational Environment Temperature: 59°F - 86°F (15°C - 30°C) Relative Humidity: 10 - 80% (No Condensation)	External Power Supply 100 - 240 VAC Autosensing +/- 10%, 50 - 60 Hz
Nozzle Pitch (Head Resolution) 1200 dpi x Two Rows	Printer Dimensions (W x D x H) and Weight TX-3200 With Basket Open: 55" x 39" x 46"; 227 lb. (Approx.) With Basket Closed: 55" x 31" x 46"; 227 lb. (Approx.) With Stacker Opened: 55" x 47" x 46"; 253 lb. (Approx.) With Stacker Closed: 55" x 45" x 46"; 253 lb. (Approx.) TX-4200 With Basket Open: 63" x 39" x 46"; 247 lb. (Approx.) With Basket Closed: 63" x 31" x 46"; 247 lb. (Approx.) With Stacker Opened: 63" x 47" x 46"; 273 lb. (Approx.) With Stacker Closed: 63" x 45" x 46"; 273 lb. (Approx.)	Scanner Power Consumption • Controller Power: Approx. 35 W • Sleep: Approx. 0.2 W • Idle: Approx. 12.4 W • Scanning Color/Grayscale at 200 dpi: Approx. 22.7 W/23.3 W
Ink Type Pigment: Matte Black (MBK), Cyan (C), Magenta (M), Yellow (Y), Black (BK)	Package Dimensions (W x D x H) and Weight TX-3200 Printer (Main Unit with Stand and Pallet): 64" x 36" x 41", 346 lb. (Approx.) Basket: 57" x 22" x 9"; 20 lb. (Approx.) Stacker: 50" x 36" x 12"; 57 lb. (Approx.) Roll Unit: 60" x 23" x 19"; 68 lb. (Approx.) TX-4200 Printer (Main Unit with Stand and Pallet): 72" x 36" x 41"; 370 lb. (Approx.) Basket: 57" x 22" x 9"; 20 lb. (Approx.) Stacker: 58" x 36" x 12"; 64 lb. (Approx.) Roll Unit: 68" x 23" x 19"; 75 lb. (Approx.)	Compliances ENERGY STAR®, CB(62368-1), CE, FCC(EMC), Cul/UL, CCC, NOM-019, EAC, C-TICK, VCCI, BIS, EMC +LOA, UL AR, WEEE, REACH, RoHS, EU - Tier 3 of Lot 6
Ink Tank Shipped with Printer: TX-3200: 160 ml C/Y/M/BK; 330 ml MBK TX-4200: 330 ml MBK/BK/C/Y/M Replacement: M: PFI-111 (160 ml)/PFI-311 (330 ml)/ PFI-711 (700 ml), MBK/BK/C/Y: PFI-110 (160 ml)/ PFI-310 (330 ml)/PFI-710 (700 ml)	Options • Multifunction Roll System (TX-3200 RU-32; TX-4200 RU-42) • 2/3" Roll Holder Set (TX-3200 RH2-34; TX-4200 RH2-46)	Scanner Package Dimensions (W x D x H) and Weight (With Stand, Pallet, and Scanner) 50" x 21" x 20", 103 lb. (Approx.)
Ink Supply Method Tubing System with Sub-tanks for Continuous Ink Supply	User-Replaceable Items • Ink Tank (PFI-110/111, PFI-310/311, PFI-710/711) • Printhead (PF-06) • Maintenance Cartridge (MC-30) • Cutter Blade (CT-07)	What's In The Box? Z36 Scanner with Power Cord, USB 3.0 Cable (2 m), 15.6" System Controller, 3:1 Trident Power Cord, Power Supply, Mount for Printer and System Controller, (2) Paper Edge Guides, (3) Document Return Guides, Calibration target, Assembly and Start Up Guide, 3:1 Trident Power Cord
Nozzle Recovery System Non-firing Nozzle Detection and Compensation	What's In The Box? Includes Main Unit, TX Stacker or Multi-Positional Catch Basket, Stand, (1)Printhead, Starter Ink Tank Set, (1) Maintenance Cartridge (Installed), 2" Roll Holder with 3" Adapters, Installation Guide, User Registration Card, Printer Warranty Statement, Printhead Warranty Statement, Call Center Notice, Media Compatibility Flyer, PosterArtist Web Notice Flyer, iWR Service Terms Leaflet, Safety and Environmental Information, USB port (High Speed), Power Cable & Screw, Gigabit Ethernet (Built-In)	"3.3 ANSI D prints/minute speed measured after first print in Fast Q5 mode, using plain paper. Print speed is based on internal testing. Print speed may vary depending on the number of copies selected, as well as on the settings for size, type, and orientation of paper. "All speeds measured using plain paper, Fast Q5 mode. The 199 ANSI D prints/hour is measured from when the first print begins printing. Print speed is based on internal testing. Print speed may vary depending on the number of copies selected, as well as on the settings for size, type, and orientation of paper. "Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon does not warrant that use of its features will prevent security issues. Some security features may impact functionality/performance; you may want to test these settings in your environment.
Printer Controller L-COA PRO	Z36 Scanner Specifications	"Line accuracy repeatability is guaranteed after a user performs the necessary adjustment and under the same environmental conditions. Applies to media for line drawing (Plain Paper, Coated Paper, CAD Translucent Matte Film, and CAD Tracing Paper) only. "Theoretical value based on data resolution. "The maximum printable length varies depending on the application, OS, and RIP used. "Wireless printing requires a working network with wireless 802.11b/g or 802.11n capability. Wireless performance may vary based on terrain and distance between the printer and wireless network clients. "The scan rate is proportional across the full range of resolutions supported by the scanner. Actual scan times will depend on the host system performance. Quoted top speeds may be limited by the effective bandwidth of the USB 2 and is not guaranteed for all media types. "The quoted scan accuracy may vary depending on the operating environment and the thickness of the media.
Printer RAM 128 GB (Virtual), 2 GB (Physical)	Scan Speed⁵ • 24-bit Color @ 200 dpi: 3" (Per Second) • 8-bit Grayscale and Monochrome @ 200 dpi: 13" (Per Second)	<i>Note: The imagePROGRAF TX Series MFP Z36 systems contain multiple components, some of which are manufactured by third parties. To the extent that such third-party offerings come with limited warranties, such limited warranties are hereby passed to the purchaser, and Canon shall have no obligation or any liability with respect to such third-party offerings.</i>
Hard Drive 500 GB (Encrypted)	Copy Speed 24-bit Color @ 200 dpi: 6" (Per Second)	
Media Feed Roll Feed: One Roll, Front-loading, Front Output	Color Space sRGB	
Media Width TX-3200 Roll Feed: 6"-36" (152 mm - 917 mm) Cut Sheet: 6"-36" (152 mm - 974 mm)	Maximum Resolution 1200 dpi (Optical)	
TX-4200 Roll Feed: 6"-44" (152 mm - 1118 mm) Cut Sheet: 6"-44" (152 mm - 1118 mm)	Scan Accuracy⁶ +/- 0.1% : +/- 1 pixel	
Printable Margins Roll Feed: All Sides: 0.12" (3 mm) or 0" for Borderless	Maximum Scan Width/Maximum Media Width 36"/38"	
Maximum Print Length (Single Page)³ Roll Feed: 59' (18 m) Cut Sheet: 63" (1.6 m)	Maximum Scan Length 164' (PDF); 315" (JPEG); 598" (TIFF)	
Borderless Printing Widths (Roll Media Only) TX-3200 Custom Roll Width 6" - 36" with Micro Margin Technology		
TX-4200 Custom Roll Width 6" - 44" with Micro Margin Technology		
Media Cutter Automatic horizontal rotary cutter		
Media Thickness 0.07 mm - 0.8 mm		
Media Core Sizes 2" with 3" Core Adapters Included		
Maximum Roll Outer Diameter 6.7" (170 mm)		
Media Output Options TX Stacker, Multipositional Catch Basket		
Printing Software Utilities Accounting Manager, Canon Print Service, Canon Production Printing (CPP) Driver Select, Canon Production Printing (CPP) PRISMA Tech Suite, Device Management Console, Direct Print Plus, Free Layout Plus, imagePROGRAF Printer Driver for Windows®/Mac®, Media Configuration Tool, PosterArtist, Optimized Driver for AutoCAD, Quick Utility Toolbox, Canon PRINT Inkjet/SELPHY		
Operating System Windows 7 (32/64-bit), Windows 8.1 (32/64-bit), Windows 10 (32/64-bit), Windows 11 (64-bit), Windows Server 2008R2, 2012, 2012R2, 2016, 2019, 2022 (64-bit), MacOS v10.15.7- MacOS 14		

Canon

LOFFLER

usa.canon.com/largeformat

Canon and imagePROGRAF are registered trademarks of Canon Inc. in the United States and may also be registered trademarks or trademarks in other countries. All other referenced product names and marks are trademarks of their respective owners. Specifications and availability subject to change without notice. Not responsible for typographical errors. Canon products offer certain security features, yet many variables can impact the security of your devices and data. Canon does not warrant that use of its features will prevent security issues. Some security features may impact functionality/performance; you may want to test these settings in your environment. ©2025 Canon U.S.A., Inc. All rights reserved.

