




Quick Reference

M1 Printer Control Panel Indicators

This Guide provides a brief overview of what the indicators are showing under different conditions.

CONTROL PANEL LED INDICATORS:

The Control Panel has 3 buttons with LED indicators.

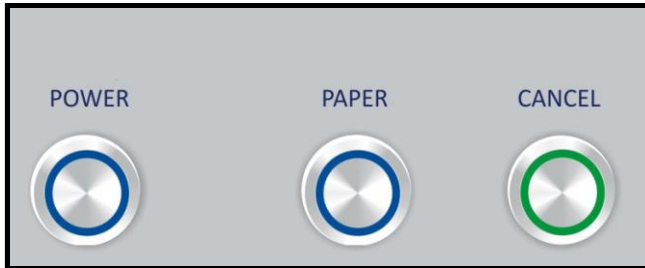

POWER (ON/OFF) – Turns Printer power ON/OFF. Turn power OFF for cleaning and maintenance.

PAPER (STOP JOB/RESUME) – Stops Paper Feed or Resumes Printing.

- **Press to Stop Paper Feed Immediately.** Printer will clear media in Printer and stop.
- **Press to Resume Printing.** Restart printing after a paper feed error (such as a paper jam or running out of paper).

CANCEL (CANCEL JOB) – Cancels a Job.

- **Press to Cancel a Job.** Once the Printer has stopped, pressing this button clears job from printer and print queue in driver.
NOTE: Cancelled Jobs must be reloaded before printing can resume.

LED Sequence	Printer Status	Recommended Action
Flashing, simultaneously 	Powering up or Shutting down	Wait for process to finish
ON, Steady 	Printer powered up in Standby mode	Load Media
ON, Steady 	One of the printing sensors is covered or dirty	Open Clamshell, remove media or clean sensors
Flashing SLOW 	Printer Paused, (Data pending)	Press PAPER to Start/Resume printing or CANCEL to clear job
Flashing FAST 	Out Of Paper (Data pending, Media not present)	Reload Media, Press PAPER to Start/Resume printing, or CANCEL to clear job
ON, Steady 	<i>Ink Supply error:</i> Ink Out, Ink Missing, Printhead Unprimed...	Replace empty Ink Tank and press PAPER to resume, or Circulate ink
Flashing SLOW, simultaneously 	<i>Busy Signal:</i> Performing maintenance, Loading, Ejecting media	Wait for process to finish
Flashing FAST, simultaneously 	<i>Hardware error:</i> Door Open, Machine tilted, Service Station Error, Printhead missing...	Find and fix error
Flashing, alternating 	Downloading Data, Printing	Press PAPER to Pause printing



ASTRO MACHINE CORP.

630 Lively Blvd.
Elk Grove Village, IL 60007
Phone: (847) 364-6363
Fax: (847) 364 9898
www.astromachine.com