



## Install Ink Tanks

Printer uses one Printhead Cartridge and five Ink Tanks (two Black, one Cyan, one Magenta, and one Yellow).


1. **Open Printer Toolbox.** Go to **Start Menu** and open **“Toolbox”**. System Status information appears in upper left corner of **System Status** window. Note that **“C, K2, M, Y, K1”** boxes are empty.

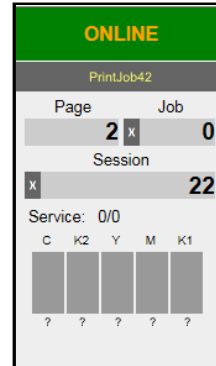

2. **Select “Replace Ink Tanks” from the “Service” drop-down menu.** (Disconnects Printer communication with Ink Tanks and allows safe installation and replacement.) Once **“Confirm”** screen displays, it is safe to install Ink Tanks. **IMPORTANT: DO NOT press “Continue” until after installing the Ink Tank(s) and closing the Ink Tank Latches.**

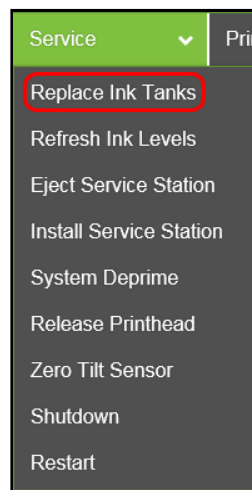


3. Open Ink Tank Door (*hinged at bottom*). Open three Latches [A].
4. Remove Ink Tank(s) from packaging.

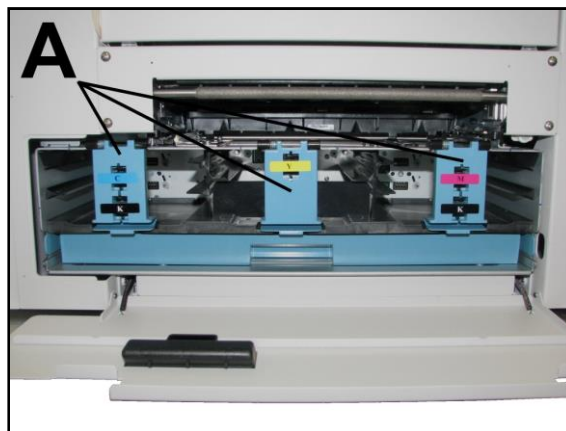


## SECTION 2 INSTALLING PRINTER

5. Insert Ink Tanks (*labels up*) into appropriate color slots [B]. Close three Ink Tank Latches.  
**INSTALLATION TIP: Make sure Ink Tanks seat properly. Insert Ink Tank into appropriate Ink Station, then pull Ink Tank back about an inch and push forward firmly to insure that Ink Nozzles penetrate seals on Ink Tanks.**

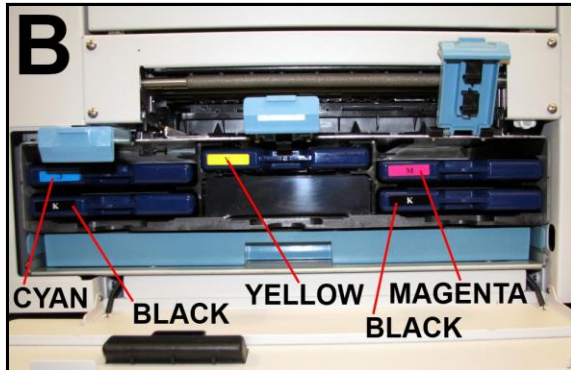

6. Click “Continue” on Confirm screen. Click on the “Service” drop-down menu in the **Toolbox**, then “Refresh Ink Levels”. Ink colors fill in as Ink Tanks are installed. If ink colors do not fill in after a few seconds, click “Replace Ink Tanks” again and reinstall Ink Tank(s).  
  
7. Close Front Cover.

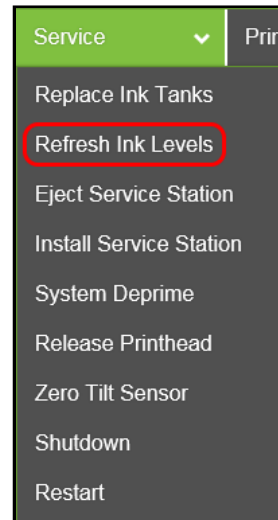

### WARNING!

Ink in Ink Tanks may be harmful if swallowed. Keep new and used Ink Tanks out of reach of children. Discard empty tanks immediately.