

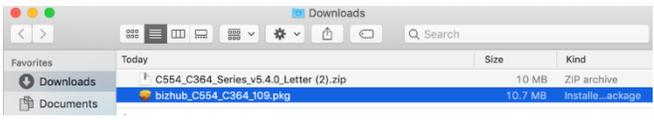


Konica Minolta Bizhub Series: Loading Mac Print Driver


| | |
|--|---|
| <p>1. Select: https://onyxweb.mykonicaminolta.com/OneStopProductSupport?appMode=Public&appMode=Public</p> |  |
| <p>2. Search for the printer model and Select Drivers.</p> |  |
| <p>3. Choose the driver based on the computer's operating system and download.</p> <ul style="list-style-type: none"> To find the correct operating system, press the Apple in the top left corner of the screen and Select About This Mac. | |
| <p>4. Open the downloaded file and select the file with .dmg.</p> |  |
| <p>5. Follow The steps in the wizard. Enter the computer's Apple ID when prompted.</p> |  |
| <p>6. Press Close then Move to Trash.</p> | |
| <p>7. From the apple in the corner, open System Preferences.</p> | |
| <p>8. Select Printers & Scanners.</p> |  |

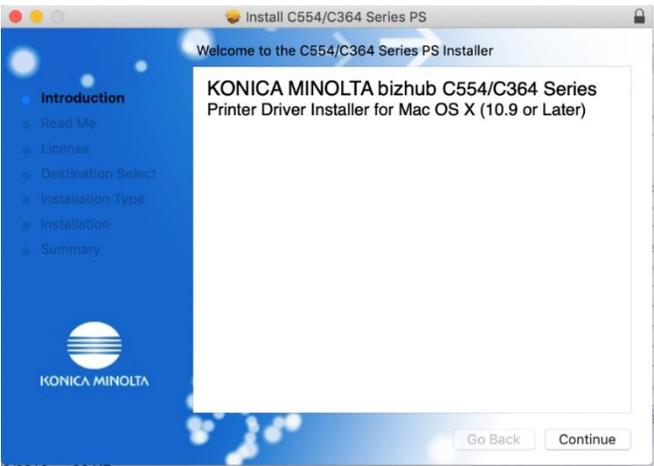

9. Select the + to add a printer.

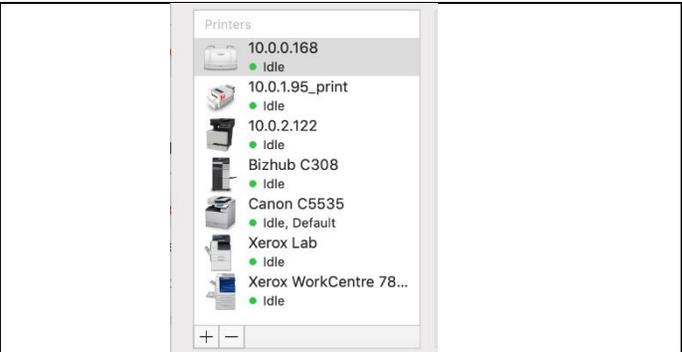


10. Select **IP** and enter the IP address.
 • To find the IP address, go to the printer. Select **Menu >> Utility >> Device Information** for the IPv4 address

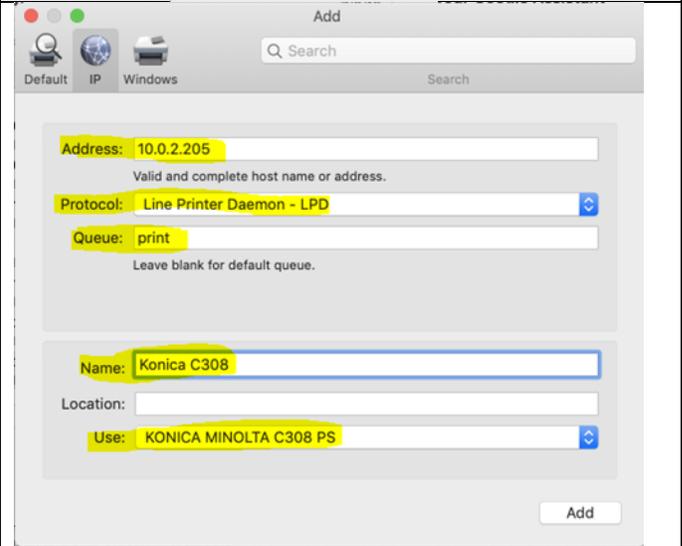


11. Make sure the Protocol is set to **Line Printer Daemon** and type **print** into the Queue.

12. Verify the machine identified the Konica driver. If not, press the drop-down menu and press **Select Software...**

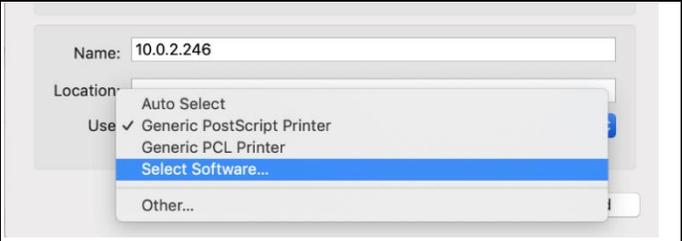


13. Search to select the correct model.

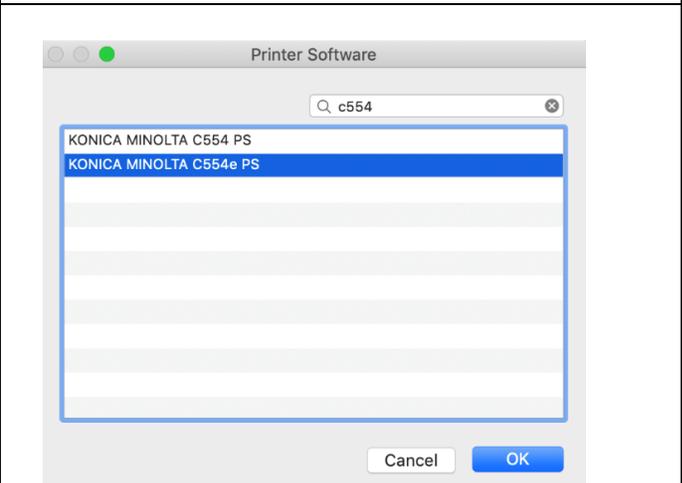

14. Select **Add**, then **OK**.

15. Select the machine's accessories in the pop up and press **OK**.

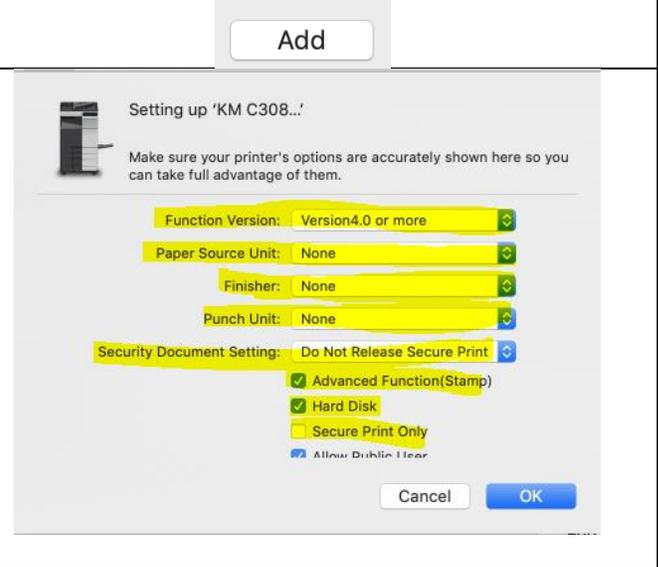

***Note: Print drivers are set to 2-sided and color by default. For assistance changing default settings, please contact the Loffler service department. Contact information is located on the red sticker on the front of the device.*

